REPORT DOCUMENTATION PAGE

Form Approved
OMB NO. 0704-0188

1. AGENCY USE ONLY (Leave Blank)	2. REPORT DATE -	3. REPORT TYPE AND DATES COVERED FINAL 01 Mar 99 - 31 Dec 00

4. TITLE AND SUBTITLE
Equipment and Coherent Control over Excitations and Signals in Semiconductors

5. FUNDING NUMBERS
DAAD19-99-1-0034

6. AUTHOR(S)
Keith A. Nelson

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
Mass. Inst. of Technology

8. PERFORMING ORGANIZATION REPORT NUMBER

9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)
U. S. Army Research Office
P.O. Box 12211
Research Triangle Park, NC 27709-2211

10. SPONSORING / MONITORING AGENCY REPORT NUMBER
ARO 39404.1-PH-RIP

11. SUPPLEMENTARY NOTES
The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.

12 a. DISTRIBUTION / AVAILABILITY STATEMENT
Approved for public release; distribution unlimited.

12 b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

This DURIP equipment supplement provided the apparatus needed for development and execution of a unique method in femtosecond pulse shaping. In particular, the method allows a single laser beam with a single femtosecond pulse to be transformed into many spatially separate beams, each one with a specified sequence of femtosecond pulses.

20010607 089

14. SUBJECT TERMS

15. NUMBER OF PAGES
5

16. PRICE CODE

17. SECURITY CLASSIFICATION OR REPORT	18. SECURITY CLASSIFICATION ON THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT
UNCLASSIFIED	**UNCLASSIFIED**	**UNCLASSIFIED**	UL

NSN 7540-01-280-5500

Standard Form 298 (Rev.2-89)
Prescribed by ANSI Std. 239-18
298-102

Army Research Office
Physics Division
P.O. Box 12211
Research Triangle Park. NC 27709-2211

Grant No. DAAD19-99-1-0034

TECHNICAL REPORT
GRANT PERIOD 1 January 1999 – 31 December 2000

Principal Investigator:
Keith A. Nelson
Professor of Chemistry
Massachusetts Institute of Technology
Room 6-235
Cambridge, MA 02139
Tel: 617/253-1423
Fax: 617/253-7030
Email: kanelson@mit.edu

This DURIP equipment supplement provided the apparatus needed for development and execution of a unique method in femtosecond pulse shaping. In particular, the method allows a single laser beam with a single femtosecond pulse to be transformed into a many spatially separate beams, each one with a specified sequence of femtosecond pulses. In this "spatiotemporal" pulse shaping, a complex optical field can be generated with many ultrashort pulses that arrive at specified locations on a sample at specified times. From a fundamental point of view, this enables coherent optical control over material responses that move through a sample at light-like speeds, using some pulses to initiate the response at one sample location and other pulses, arriving at other sample locations at specified times, to manipulate the rapidly moving response. The method has been applied successfully to the manipulation of coherent polariton responses. These are very short, very fast electromagnetic/polar lattice vibrational responses that induce large fields and crystalline displacements wherever the go in the sample.

From an applications point of view, the method permits highly multiplexed generation of ultrahigh (THz) bandwidth optical signals. These can be made to arrive at specified addresses on a device at specified times. In the application demonstrated by us, the polariton responses can be viewed as THz-bandwidth signals. These signals are controlled and manipulated as they move at light-like speeds among different addresses on a device. Thus we have demonstrated

extraordinarily high-bandwidth optical signal processing. Applications in high-bandwidth photonics switching, using semiconductor samples, are currently being pursued.

The attached figure 1 shows the automated femtosecond pulse shaping results. The pulse shaping principles are illustrated in figures 1a and 1b, the automated pulse shaper is illustrated schematically in figure 1c, and a spatially and temporally shaped output consisting of three separated beams, each with several pulses, is shown in figure 1d.

The attached figure 4 (both figures are taken from a recent ARO proposal) illustrates the use of the spatiotemporal pulse shaper for spatiotemporal coherent control over polaritonic signals moving at light-like speeds. Figure 4a shows the experimental arrangement. Figure 4b shows the output of the spatiotemporal pulse shaper, consisting mainly of 14 pulses, each separated spatially and temporally such that one after the other generates and repeatedly amplifies the propagating signal. This is analogous to a traveling wave amplifier for GHz electronics, but at THz frequencies and bandwidths. It is a first demonstration of what will be a broad range of ultrahigh-bandwidth electrooptical signal processing capabilities.

The results of this project have been submitted for publication, and additional submissions will be forthcoming.

Figure 1. Spatiotemporal femtosecond pulse shaping

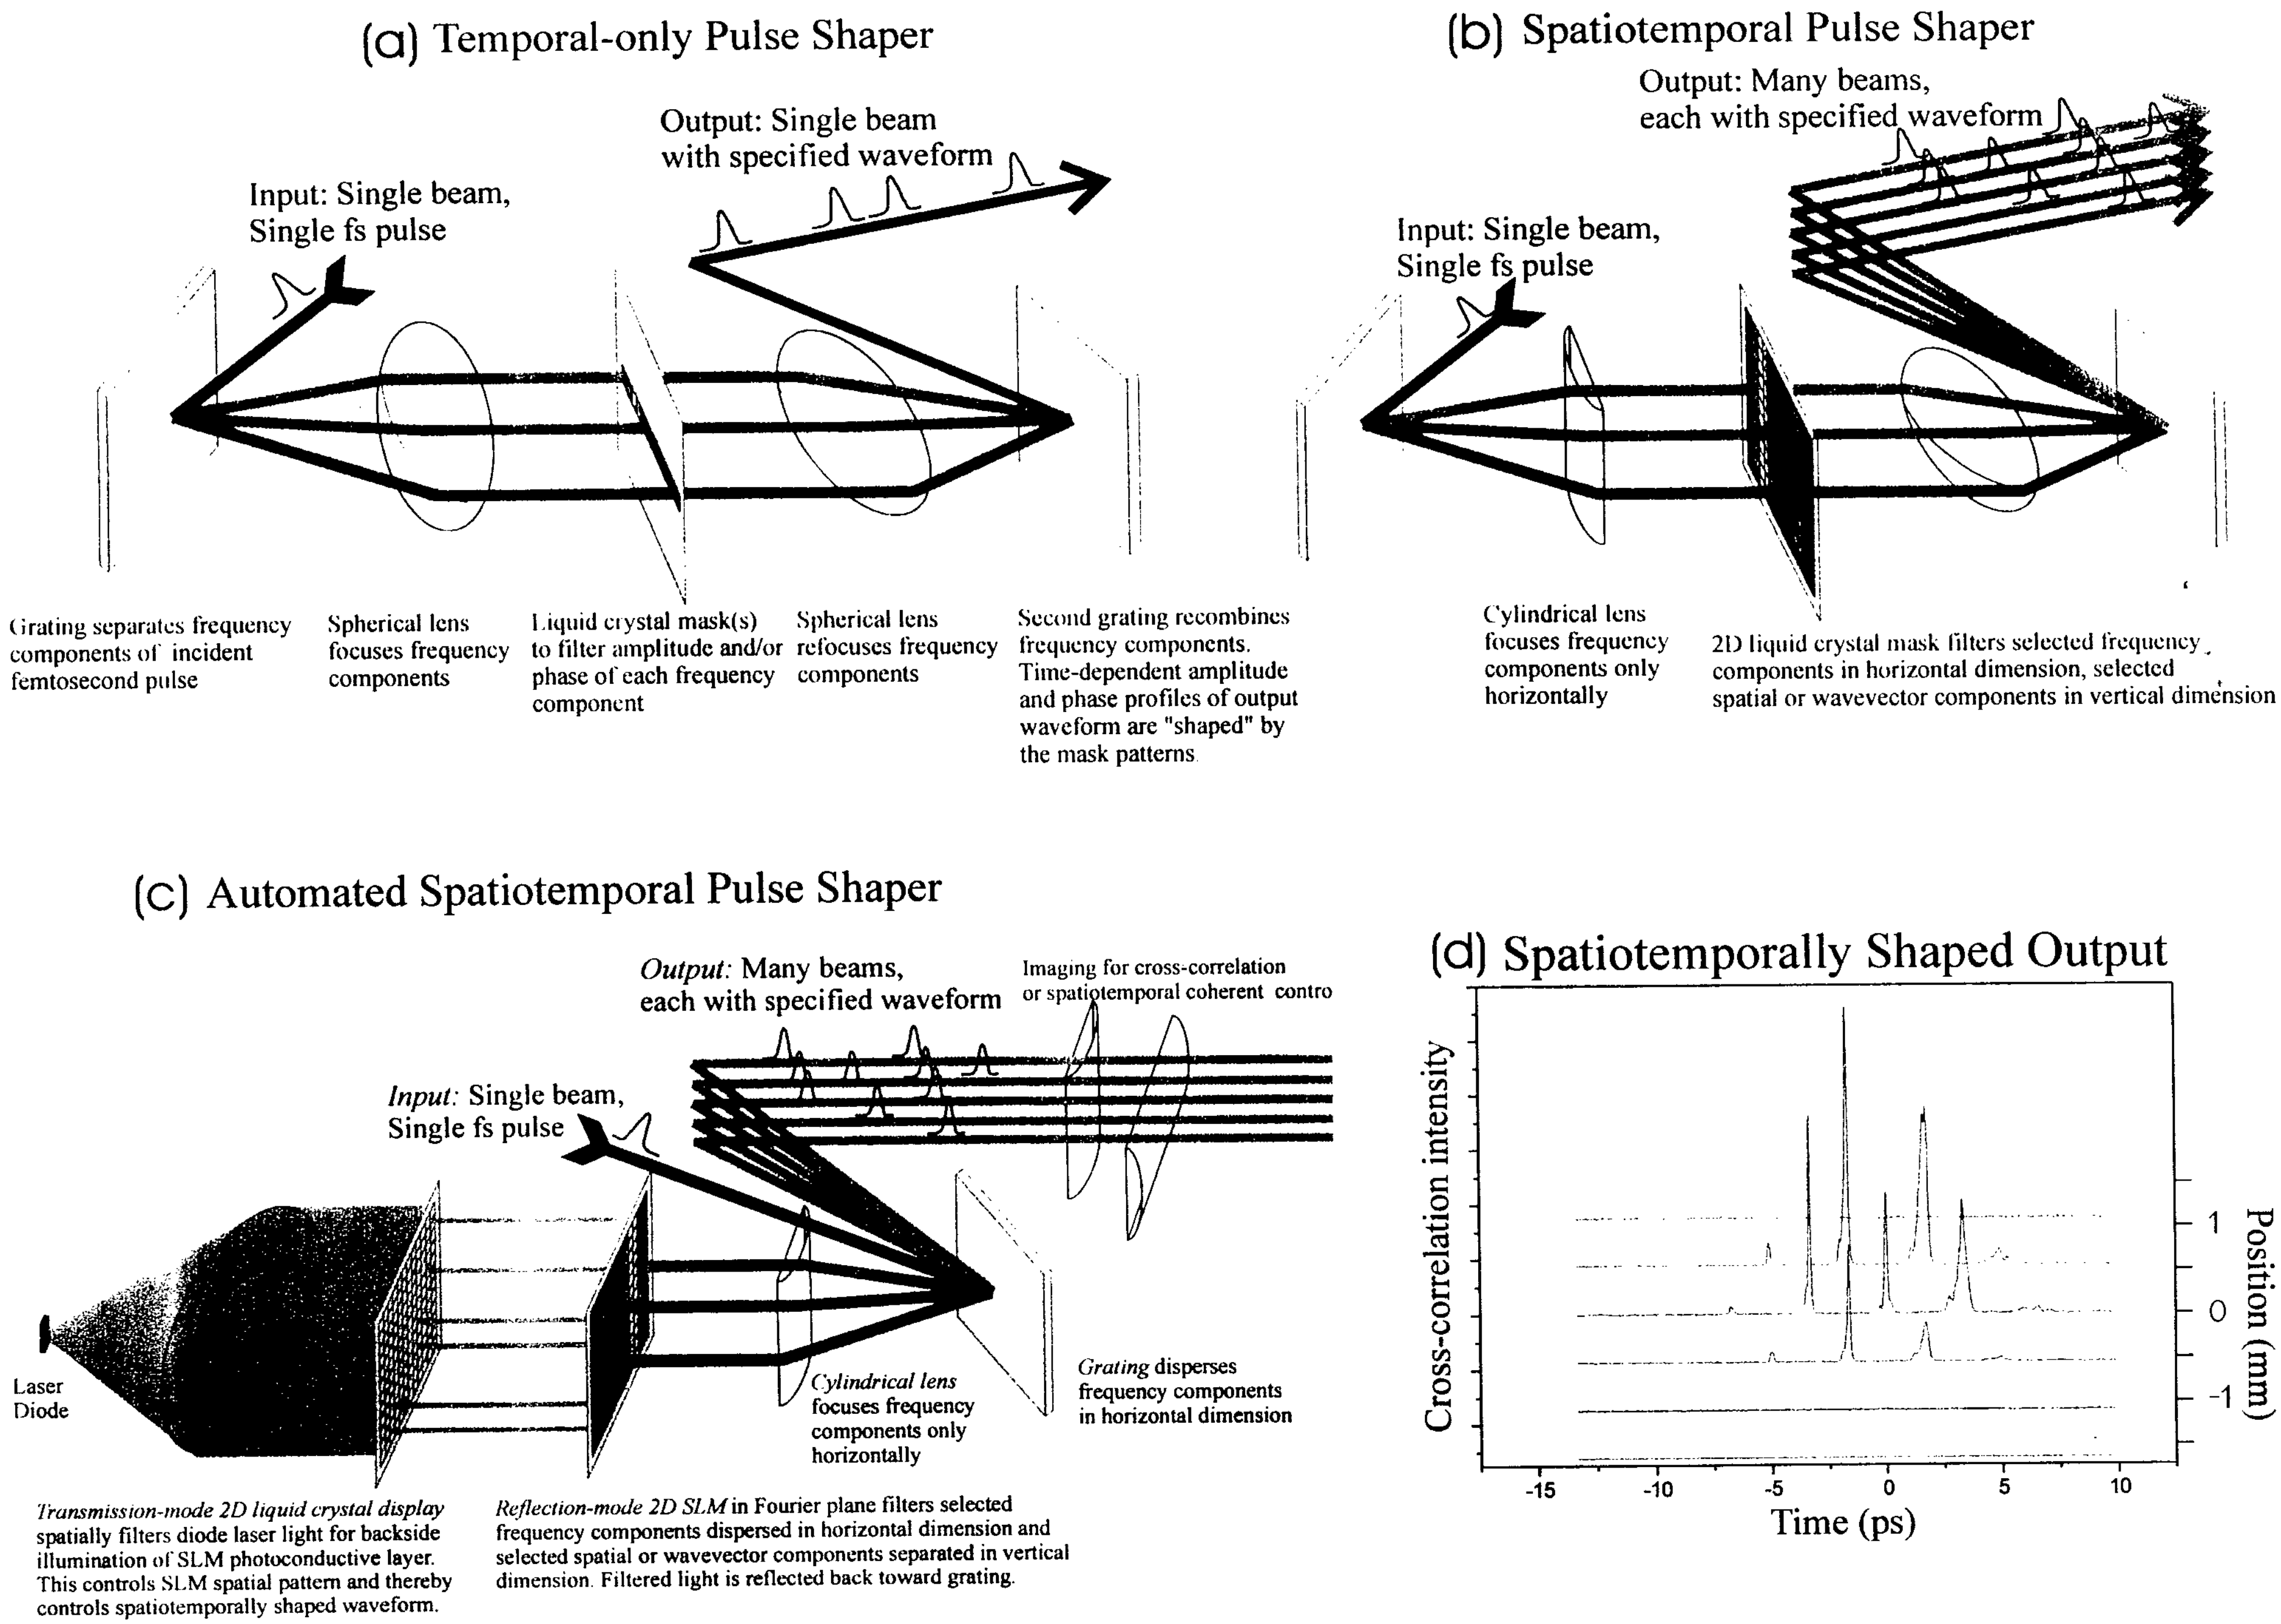

Figure 4. Spatiotemporal coherent control (automated)

(a) Automated spatiotemporal control system

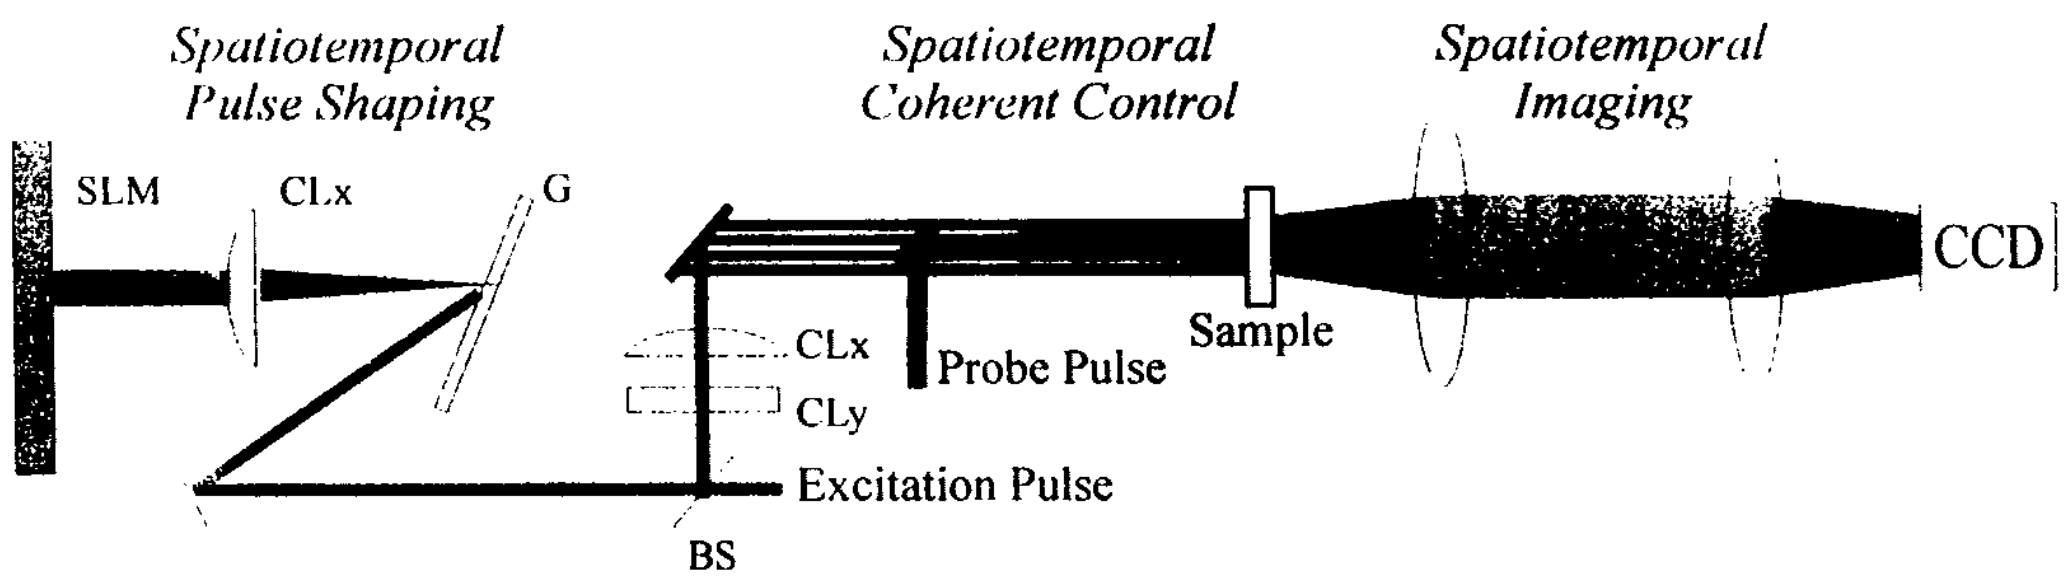

Preliminary results of an integrated system (a) for automated spatiotemporal coherent control. The waveform used (b, central region) has a series of more than 12 spatially and temporally shifted pulses. (Unwanted, weaker replica waveforms appear at shorter and longer times.) The pulses, focused to round spots, move along the $LiTaO_3$ sample (downward in part c) generating weak polariton "rings" (as in Fig. 2b) whose leading edges are amplified when the polariton group velocity is matched (top set of images).

(b) Polariton amplification waveform

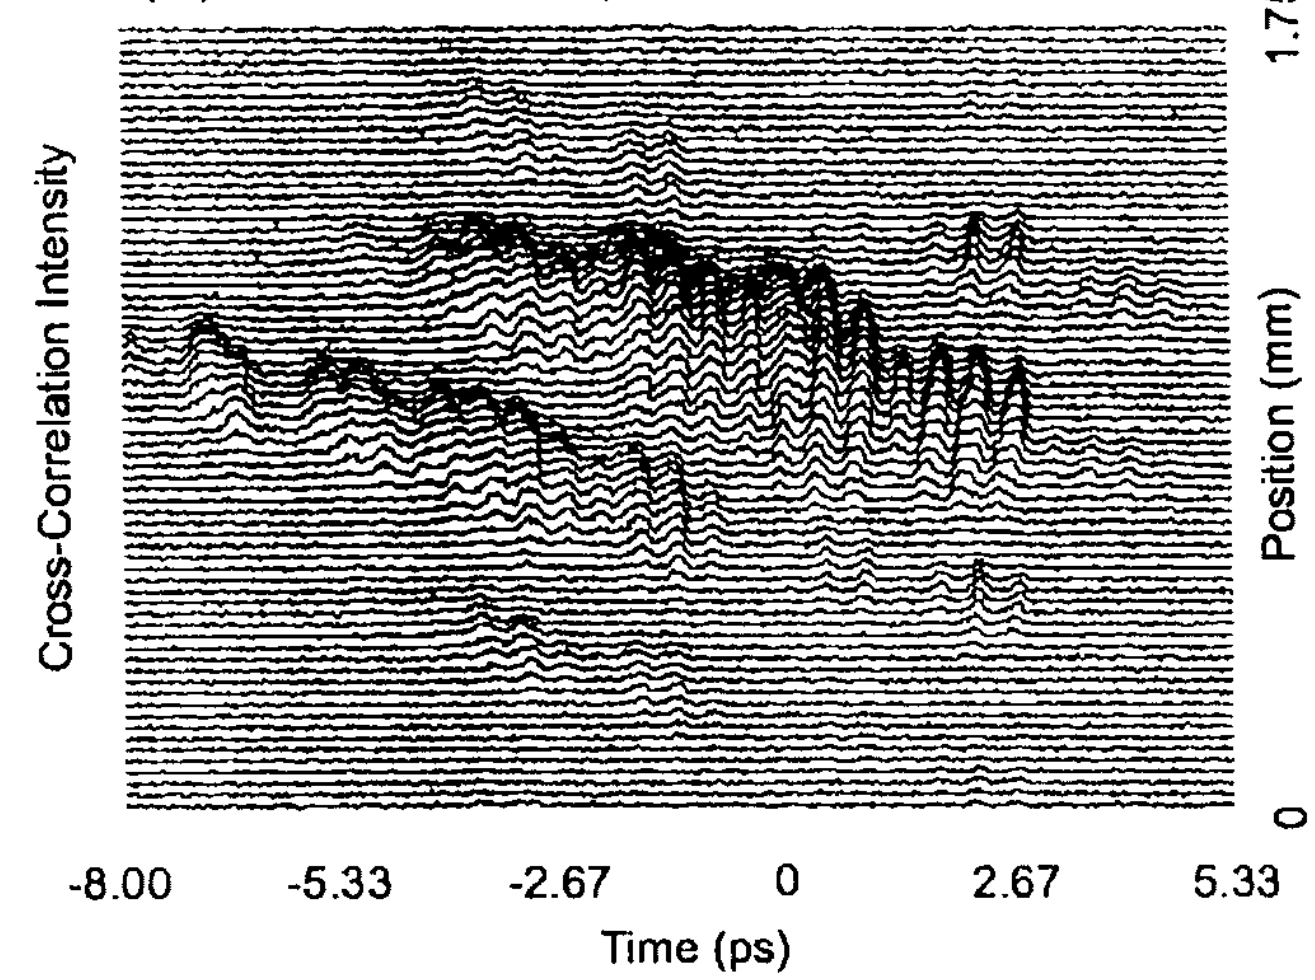

(c) Automated spatiotemporal polariton control: Preliminary results

Excitation spots move along crystal at polariton group velocity: Coherent polariton amplification

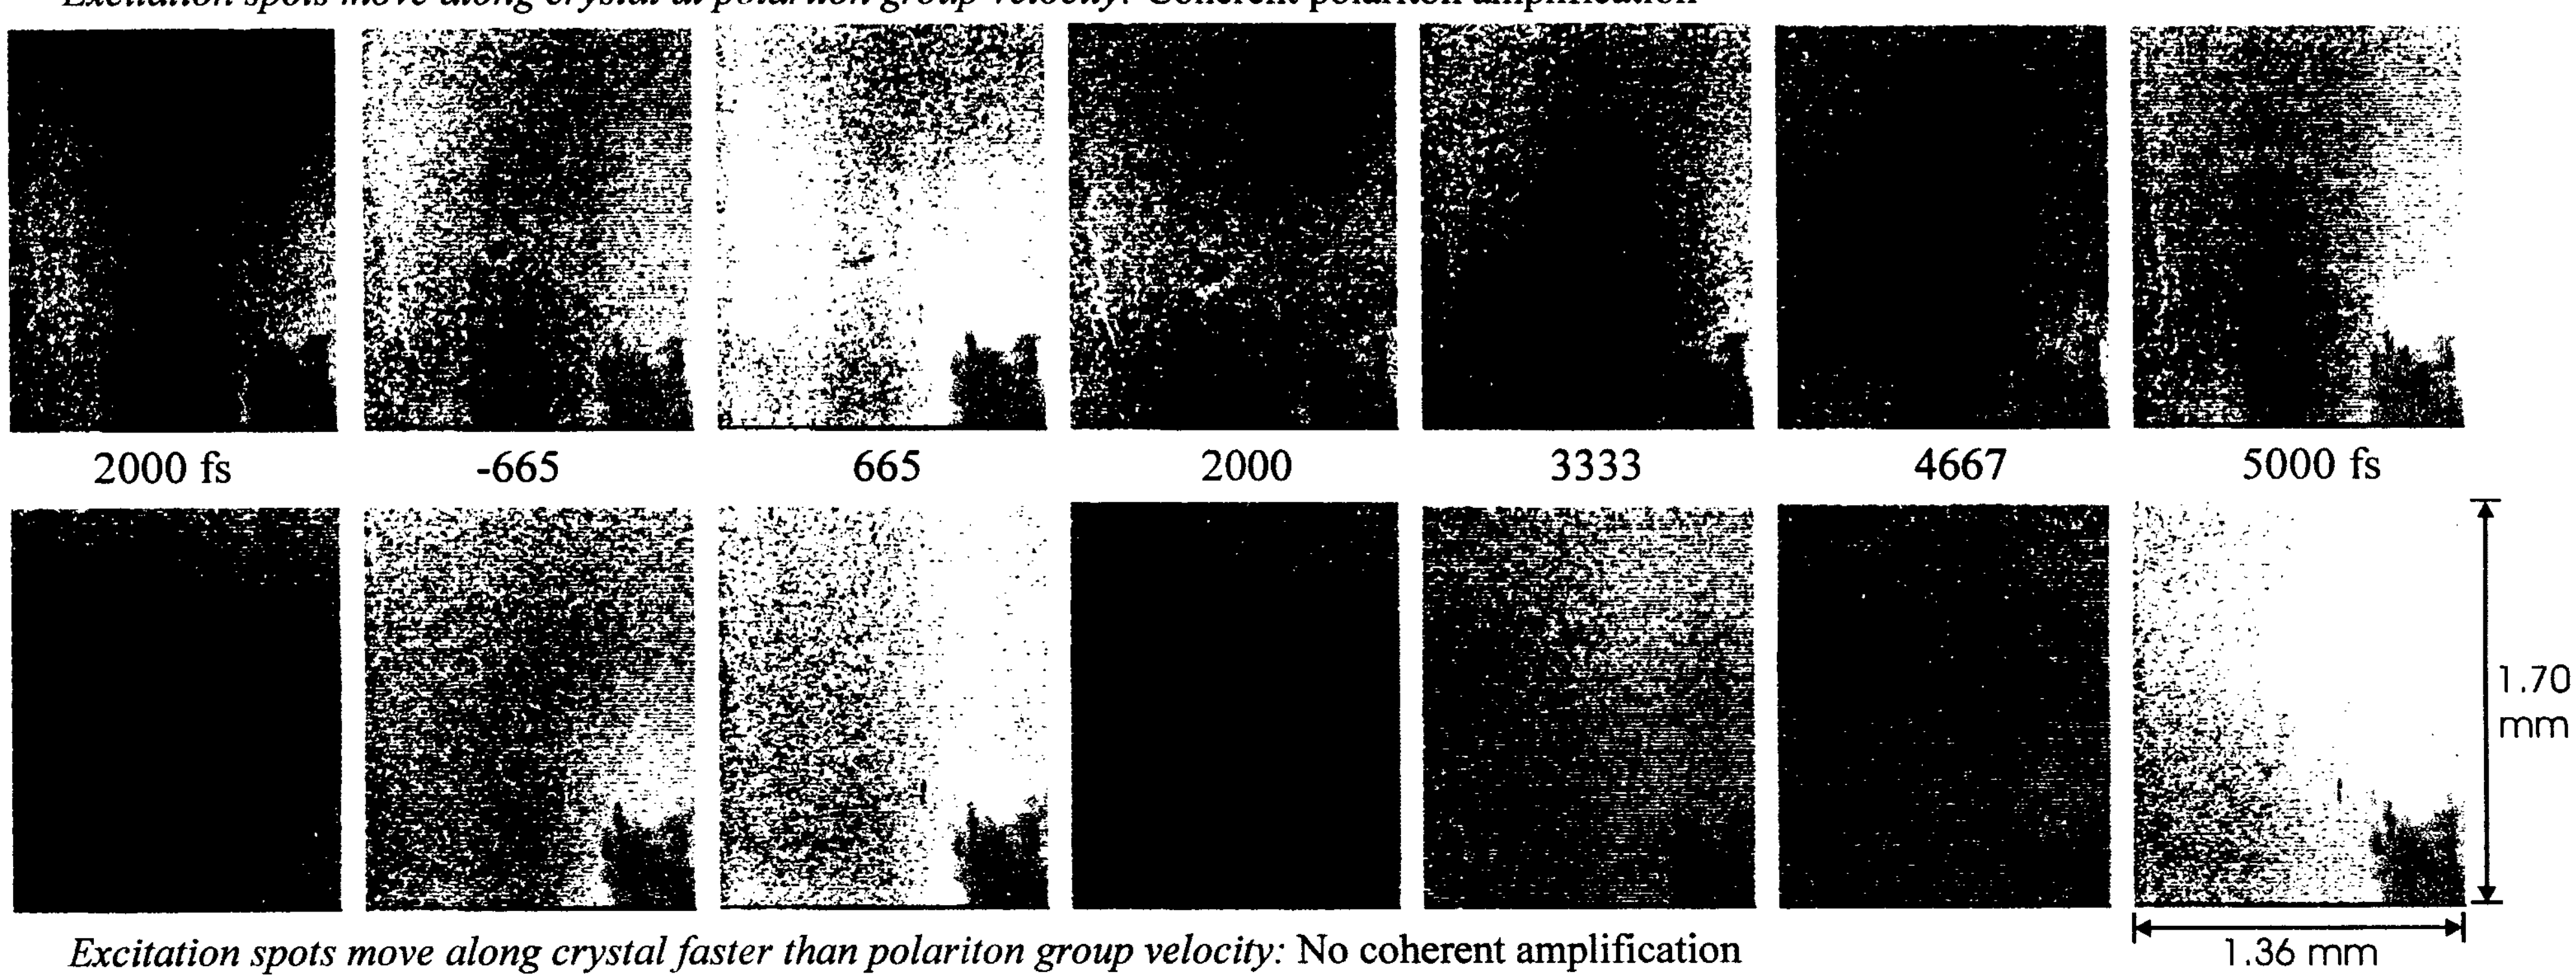

Excitation spots move along crystal faster than polariton group velocity: No coherent amplification